



Electrical Requirements - 208-240V / 60Hz - USA, Mexico & Canada

Technical Specifications


MODEL	IMAGE	SPECS	WEIGHT	WATER	VOLTAGE	PHASE	Amps
440X / 450X Series Lounge		L- 91" / 231cm W- 32" / 81cm H- 43" / 109cm	285 lbs. / 129 kg. empty. 385 lbs. / 167 kg. w/ water	14 gallons / 53 liters distilled water	208-240 Volts 60 Hz	Single	30 Amp
340 / 350 Series Bed		L- 91" / 231cm W- 39" / 99cm H- 26" / 66cm	260 lbs. / 118 kg. empty. 500 lbs. / 227 kg. w/ water	30 gallons / 114 liters distilled water	208-240 Volts 60Hz	Single	30 Amp

Electrical Requirements



Series 300-400X Models *these items are required for EACH HydroMassage unit.

- **A:** 208-240 Volt, single-phase, dedicated line with a 30 Amp dedicated breaker and 10-gauge wire (2 hot legs and a ground*). Install 6" above the floor. **A** on diagram 30 Amp, 250 Volt NEMA L6-30R Locking Receptacle (three prong plug).
- **B:** For use with external timer (ex. T-Max) and maintenance: 110 Volt outlet required. Install 6" above floor. **B** on diagram.
- **C:** CAT-5 or CAT-6 terminated network jack (able to connect to internet). **C** on diagram.

NEMA L6-30R
Locking
Receptacle

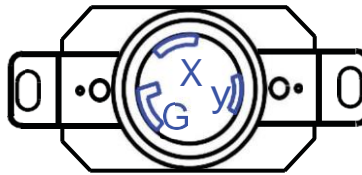

Electrical Wiring Diagrams

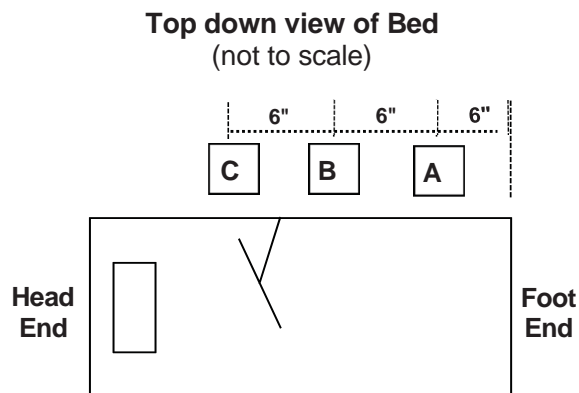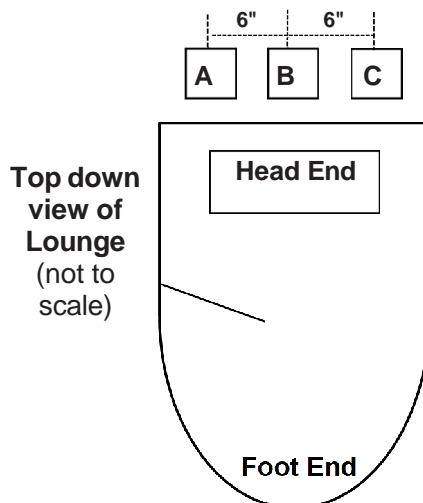

Unique set of items A, B, C required **FOR EACH** HydroMassage unit. If necessary, location of outlets above may be moved within +/- 6 inches. Call 1-800-699-1008 for details.

Water Requirements: Distilled water required. Distilled water is available at major supermarkets or directly from your water supplier (if you have a water delivery service).

